

Mikroschalter













Lieferant: Omron

Bestell.-Nr.:


SS 0.1 T	100mA	905.9479	
SS 5 T	5A	905.9480	wird für 3A Variante verwendet
SS 10 T	10A	905.9481	

SS _____ OMRON _____ SS

■ List of Models

Rating	Actuator	OF max.	Solder terminals	Quick-connect terminals (#110)	PCB terminals
0.1 A	Pin plunger 	0.25 N {25 gf}	SS-01-E	SS-01-ET	SS-01-ED
		0.49 N {50 gf}	SS-01-F	SS-01-FT	SS-01-FD
		1.47 N {150 gf}	SS-01	SS-01T	SS-01D
	Hinge lever 	0.08 N {8 gf}	SS-01GL-E	SS-01GL-ET	SS-01GL-ED
		0.16 N {16 gf}	SS-01GL-F	SS-01GL-FT	SS-01GL-FD
		0.49 N {50 gf}	SS-01GL	SS-01GLT	SS-01GLD
	Simulated roller lever 	0.08 N {8 gf}	SS-01GL13-E	SS-01GL13-ET	SS-01GL13-ED
		0.16 N {16 gf}	SS-01GL13-F	SS-01GL13-FT	SS-01GL13-FD
		0.49 N {50 gf}	SS-01GL13	SS-01GL13T	SS-01GL13D
	Hinge roller lever 	0.08 N {8 gf}	SS-01GL2-E	SS-01GL2-ET	SS-01GL2-ED
		0.16 N {16 gf}	SS-01GL2-F	SS-01GL2-FT	SS-01GL2-FD
		0.49 N {50 gf}	SS-01GL2	SS-01GL2T	SS-01GL2D
5 A	Pin plunger 	0.49 N {50 gf}	SS-5-F	SS-5-FT	SS-5-FD
		1.47 N {150 gf}	SS-5	SS-5T	SS-5D
	Hinge lever 	0.16 N {16 gf}	SS-5GL-F	SS-5GL-FT	SS-5GL-FD
		0.49 N {50 gf}	SS-5GL	SS-5GLT	SS-5GLD
	Simulated roller lever 	0.16 N {16 gf}	SS-5GL13-F	SS-5GL13-FT	SS-5GL13-FD
		0.49 N {50 gf}	SS-5GL13	SS-5GL13T	SS-5GL13D
	Hinge roller lever 	0.16 N {16 gf}	SS-5GL2-F	SS-5GL2-FT	SS-5GL2-FD
		0.49 N {50 gf}	SS-5GL2	SS-5GL2T	SS-5GL2D
10.1 A	Pin plunger 	1.47 N {150 gf}	SS-10	SS-10T	SS-10D
	Hinge lever 	0.49 N {50 gf}	SS-10GL	SS-10GLT	SS-10GLD
	Simulated roller lever 	0.49 N {50 gf}	SS-10GL13	SS-10GL13T	SS-10GL13D
	Hinge roller lever 	0.49 N {50 gf}	SS-10GL2	SS-10GL2T	SS-10GL2D

Note: Consult your OMRON sales representative for details on SPST-NO and SPST-NC models.

				2005	Datum	Name	Datenblatt Mikroschalter Omron
				Bearb.	06.07.	Bir.	
				Gepr.			
				Vert.			
				EDV-Datenblatt			
				nicht manuell ändern			
a	9415	27.03.0	Schillak	 SCHURTER			H 905.9479-9481
-	9065	6.07.05	Birmelin				
Zu	Änd.	Datum	Name	D 79346 Emdingen			Seite 1 von 7 Index: --

Specifications

■ Ratings


Model	Item	
	Rated voltage	Resistive load
SS-10	250 VAC	10.1 A
SS-5	125 VAC	5 A
	250 VAC	3 A
SS-01	125 VAC	0.1 A
	30 VDC	0.1 A

Note: The ratings values apply under the following test conditions:
 Ambient temperature: 20±2°C
 Ambient humidity: 65±5%
 Operating frequency: 30 operations/min

■ Switching Capacity per Load (Reference Values)

Voltage	SS-10, SS-5								SS-01	
	Non-inductive load				Inductive load				Non-inductive load	
	Resistive load		Lamp load		Inductive load		Motor load		Resistive load	
	NC	NO	NC	NO	NC	NO	NC	NO	NC	NO
125 VAC	5 (10.1) A (see note 1)		1.5 A	0.7 A	3 A		2.5 A	1.3 A	0.1 A	
250 VAC	3 (10.1) A (see note 1)		1 A	0.5 A	2 A		1.5 A	0.8 A	---	
8 VDC	5 (10.1) A (see note 1)		2 A		5 A	4 A	3 A		0.1 A	
14 VDC	5 (10.1) A (see note 1)		2 A		4 A	4 A	3 A		0.1 A	
30 VDC	4 A		2 A		3 A	3 A	3 A		0.1 A	
125 VDC	0.4 A		0.05 A		0.4 A	0.4 A	0.05 A		---	
250 VDC	0.2 A		0.03 A		0.2 A	0.2 A	0.03 A		---	

- Note:**
1. Data in parentheses apply to the SS-10 models only.
 2. The above values are for the steady-state current.
 3. Inductive load has a power factor of 0.4 min. (AC) and a time constant of 7 ms max. (DC). The inductive load rating of SS-10 is the same as that of SS-5.
 4. Lamp load has an inrush current of 10 times the steady-state current.
 5. Motor load has an inrush current of 6 times the steady-state current.
 6. If the Switch is used in a DC circuit and is subjected to a surge, connect a surge suppressor across the Switch.

				2005	Datum	Name	Datenblatt Mikroschalter Omron
				Bearb.	06.07.	Bir.	
				Gepr.			
				Vert.			
				EDV-Datenblatt			
				nicht manuell ändern			
a	9415	27.03.0	Schillak	 SCHURTER			H 905.9479-9481
-	9065	6.07.05	Birmelin				
Zu	Änd.	Datum	Name				
				D 79346 Eendingen			Seite 2 von 7 Index: --

■ Characteristics

Operating speed	0.1 mm to 1 m/s (pin plunger models)
Operating frequency	Mechanical: 400 operations/min max. Electrical: 30 operations/min max.
Insulation resistance	100 MΩ min. (at 500 VDC)
Contact resistance (initial value)	OF 1.47 N (150 gf): SS-10, SS-5 models: 30 mΩ max. SS-01 models: 50 mΩ max. OF 0.49 N (50 gf): SS-5 models: 50 mΩ max. SS-01 models: 100 mΩ max. OF 0.25 N (25 gf): SS-01 models: 150 mΩ max.
Dielectric strength (see note 2)	1,000 VAC (600 VAC for SS-01 models), 50/60 Hz for 1 min between terminals of the same polarities 1,500 VAC, 50/60 Hz for 1 min between current-carrying metal part and ground, and between each terminal and non-current-carrying metal part
Vibration resistance (see note 3)	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance (see note 4)	Destruction: OF 1.47 N (150 gf): 1,000 m/s ² (approx. 100G) max. OF 0.25 N (25gf)/0.49 N (50 gf): 500 m/s ² (approx. 50G) max. Malfunction: OF 1.47 N (150 gf): 300 m/s ² (approx. 30G) max. OF 0.25 N (25 gf)/0.49 N (50 gf): 200 m/s ² (approx. 20G) max.
Durability (see note 5)	Mechanical: 30,000,000 operations min. (60 operations/min) (Refer to the following <i>Engineering Data</i> .) 10,000,000 operations min. (60 operations/min) for SS-10 models Electrical: 200,000 operations min. (30 operations/min) (Refer to the following <i>Engineering Data</i> .) 50,000 operations min. (30 operations/min) for SS-10 models
Degree of protection	IEC IP40
Degree of protection against electrical shock	Class 1
Proof Tracking Index (PTI)	175
Ambient operating temperature	-25°C to 85°C (at ambient humidity of 60% max.) (with no icing)
Ambient operating humidity	85% max. (for 5°C to 35°C)
Weight	Approx. 1.6 g (pin plunger models)

- Note: 1. The data given above are initial values.
2. The dielectric strength shown in the table indicates a value for models with a Separator.
3. For the pin plunger models, the above values apply for use at both the free position and total travel position. For the lever models, they apply at the total travel position.
4. Lever-type models: Total travel position (with a contact separation time of 1 ms max.)
5. For testing conditions, contact your OMRON sales representative.

■ Approved Standards

Consult your OMRON sales representative for specific models with standard approvals.

UL1054 (File No. E41515)/CSA C22.2 No. 55 (File No. LR21642)

Rated voltage	SS-10	SS-5	SS-01
125 VAC	---	5 A	0.1 A
250 VAC	10.1 A	3 A	---
30 VDC	---	---	0.1 A

EN61058-1 (File No. 129246 for SS-5, 125256 for SS-10, VDE approval)

Rated voltage	SS-10	SS-5
250 VAC	10 A	5 A

EN61058-1 (File No. J9451450, TÜV Rheinland approval)

Rated voltage	SS-10	SS-5
250 VAC	10 A	5 A

Testing conditions: 5E4 (50,000 operations); T85 (0°C to 85°C).

■ Contact Specifications

Item	SS-10	SS-5	SS-01
Contact	Specification	Rivet	Crossbar
	Material	Silver alloy	Silver
	Gap (standard value)	0.5 mm	0.25 mm
Inrush current	NC	20 A max.	1 A max.
	NO	15 A max.	10 A max.
Minimum applicable load (see note)	160 mA at 5 VDC		1 mA at 5 VDC


Note: For more information on the minimum applicable load, refer to *Using Micro Loads* on page 175.

				2005	Datum	Name	Datenblatt Mikroschalter Omron
				Bearb.	06.07.	Bir.	
				Gepr.			
				Vert.			
				EDV-Datenblatt			
				nicht manuell ändern			
a	9415	27.03.0	Schillak	SCHURTER			H 905.9479-9481
-	9065	6.07.05	Birmelin				
Zu	Änd.	Datum	Name				
				D 79346 Eendingen			Seite 3 von 7 Index: --

Engineering Data (Reference Values)


Mechanical Durability (Pin Plunger Models)

SS-5, SS-1, SS-01 Models

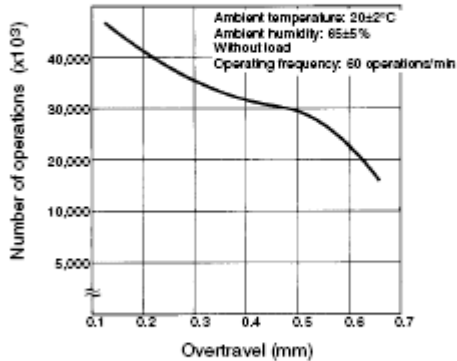

Electrical Durability (Pin Plunger Models)

SS-5 Models

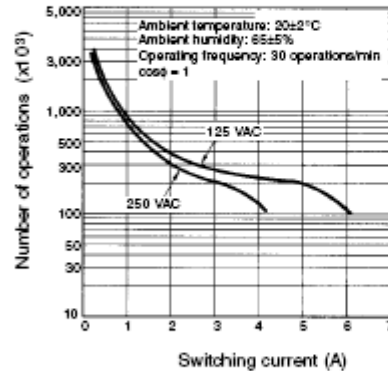


Dimensions

Note: All units are in millimeters unless otherwise indicated.


■ Terminals

Terminal plate thickness is 0.5 mm for all models.


Solder Terminals




Quick-connect Terminals (#110)

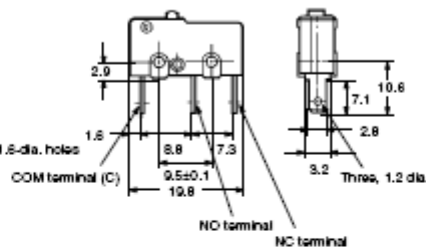


PCB Terminals

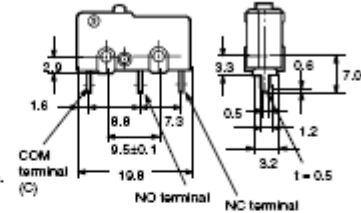

PCB Mounting Dimensions (Reference)



■ Mounting Holes




				2005	Datum	Name	Datenblatt Mikroschalter Omron	
				Bearb.	06.07.	Bir.		
				Gepr.				
				Vert.				
				EDV-Datenblatt				
				nicht manuell ändern				
a	9415	27.03.0	Schillak	SCHURTER			H 905.9479-9481	
-	9065	6.07.05	Birmelin					
Zu	Änd.	Datum	Name					
				D 79346 Eendingen			Seite 4 von 7	Index: --

■ Dimensions and Operating Characteristics

- Note: 1. All units are in millimeters unless otherwise indicated.
 2. The following illustration and drawing are for solder terminal models. Refer to page 172 for details on models with quick-connect terminals (#110) or PCB terminals.
 3. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.
 4. The operating characteristics are for operation in the A direction (➔).

Pin Plunger Models


SS-01(-E, -F)
 SS-5(-F)
 SS-10

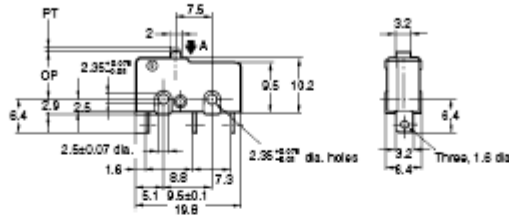

Model	SS-01-E	SS-01-F SS-5-F	SS-01 SS-5	SS-10
OF max.	0.25 N (25 gf)	0.49 N (50 gf)	1.47 N (150 gf)	1.47 N (150 gf)
RF min.	0.02 N (2 gf)	0.04 N (4 gf)	0.25 N (25 gf)	0.25 N (25 gf)
PT max.	0.5 mm	0.5 mm	0.5 mm	0.6 mm
OT min.	0.5 mm	0.5 mm	0.5 mm	0.4 mm
MD max.	0.1 mm	0.1 mm	0.1 mm	0.12 mm
OP	8.4±0.5 mm			

Hinge Lever Models

SS-01GL(-E, -F)
 SS-5GL(-F)
 SS-10GL

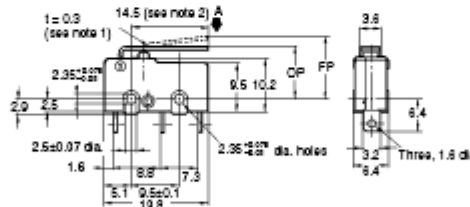

Note: 1. Stainless-steel lever

2. Besides the SS-01GL models with a hinge lever length of 14.5, the SS-01GL11 models with a hinge lever length of 18.5, the SS-01GL111 models with a hinge lever length of 22.5, and the SS-01GL1111 models with a hinge lever length of 37.8 are available. Contact your OMRON representative for these models.


Model	SS-01GL-E	SS-01GL-F SS-5GL-F	SS-01GL SS-5GL	SS-10GL
OF max.	0.08 N (8 gf)	0.16 N (16 gf)	0.49 N (50 gf)	0.49 N (50 gf)
RF min.	0.01 N (1 gf) (reference value)	0.02 N (2 gf)	0.08 N (8 gf)	0.08 N (8 gf)
OT min.	1.2 mm	1.2 mm	1.2 mm	1.0 mm
MD max.	0.8 mm	0.8 mm	0.8 mm	1.0 mm
FP max.	13.6 mm			
OP	8.8±0.8 mm			

Note: The values indicated in parentheses are reference values for cases when the installation direction is such that the lever weight is not applied to the plunger.

				2005	Datum	Name	Datenblatt Mikroschalter Omron
				Bearb.	06.07.	Bir.	
				Gepr.			
				Vert.			
				EDV-Datenblatt			
				nicht manuell ändern			
a	9415	27.03.0	Schillak	SCHURTER			H 905.9479-9481
-	9065	6.07.05	Birmelin				
Zu	Änd.	Datum	Name				
				D 79346 Eendingen			Seite 5 von 7 Index: --

Simulated Roller Lever Models

SS-01GL13(-E, -F)
SS-5GL13(-F)
SS-10GL13

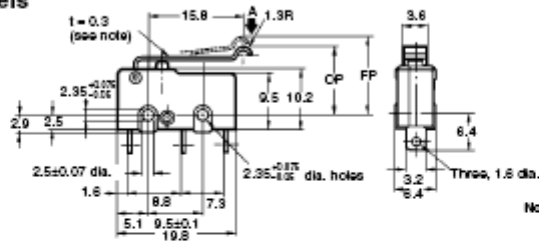


Note: Stainless-steel spring lever

Model	SS-01GL13-E	SS-01GL13-F SS-5GL13-F	SS-01GL13 SS-5GL13	SS-10GL13
OF max.	0.08 N {8 gf}	0.16 N {16 gf}	0.49 N {50 gf}	0.49 N {50 gf}
RF min.	0.01 N {1 gf} (reference value)	0.02 N {2 gf}	0.06 N {6 gf}	0.06 N {6 gf}
OT min.	1.2 mm	1.2 mm	1.2 mm	1.0 mm
MD max.	0.8 mm	0.8 mm	0.8 mm	1.0 mm
FP max.	15.5 mm			
OP	10.7±0.8 mm			

Note: The values indicated in parentheses are reference values for cases when the installation direction is such that the lever weight is not applied to the plunger.

Hinge Roller Lever Models

SS-01GL2(-E, -F)
SS-5GL2(-F)
SS-10GL2

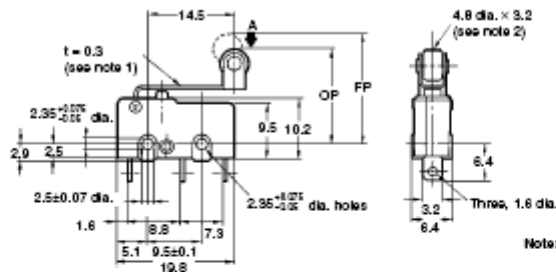

Note: 1. Stainless-steel spring lever
2. Polyacetal resin roller

Model	SS-01GL2-E	SS-01GL2-F SS-5GL2-F	SS-01GL2 SS-5GL2	SS-10GL2
OF max.	0.08 N {8 gf}	0.16 N {16 gf}	0.49 N {50 gf}	0.49 N {50 gf}
RF min.	0.01 N {1 gf} (reference value)	0.02 N {2 gf}	0.06 N {6 gf}	0.06 N {6 gf}
OT min.	1.2 mm	1.2 mm	1.2 mm	1.0 mm
MD max.	0.8 mm	0.8 mm	0.8 mm	1.0 mm
FP max.	19.3 mm			
OP	14.5±0.8 mm			

Note: The values indicated in parentheses are reference values for cases when the installation direction is such that the lever weight is not applied to the plunger.

				2005	Datum	Name	Datenblatt Mikroschalter Omron	
				Bearb.	06.07.	Bir.		
				Gepr.				
				Vert.				
				EDV-Datenblatt				
				nicht manuell ändern				
a	9415	27.03.0	Schillak	SCHURTER			H 905.9479-9481	
-	9065	6.07.05	Birmelin					
Zu	Änd.	Datum	Name					
				D 79346 Eendingen			Seite 6 von 7	Index: --

Precautions

Refer to pages 26 to 31 for common precautions.

■ Cautions

Terminal Connection

When soldering the lead wire to the terminal, first insert the lead wire conductor through the terminal hole and then conduct soldering.

Make sure that the capacity of the soldering iron is 60 W maximum. Do not take more than 5 s to solder the switch terminal. Improper soldering involving an excessively high temperature or excessive soldering time may deteriorate the characteristics of the Switch.

Be sure to apply only the minimum required amount of flux. The Switch may have contact failures if flux intrudes into the interior of the Switch.

Use the following lead wires to connect to the solder terminals.

Model	Conductor size
SS-5	0.5 to 0.75 mm ²
SS-10	0.75 mm ²

If the PCB terminal models are soldered in the solder bath, flux will permeate inside the Switch and cause contact failure. Therefore, manually solder the PCB terminal.

Wire the quick-connect terminals (#110) with receptacles. Insert the terminals straight into the receptacles. Do not impose excessive force on the terminal in the horizontal direction, otherwise the terminal may be deformed or the housing may be damaged.

Insulation Distance

According to EN61058-1, the minimum insulation thickness for this Switch should be 1.1 mm and minimum clearance distance between the terminal and mounting plate should be 1.6 mm. If the insulation distance cannot be provided in the product incorporating the Switch, either use a Switch with insulation barrier or use a Separator to ensure sufficient insulation distance. Refer to Separator on page 152.

■ Correct Use

Mounting

Turn OFF the power supply before mounting or removing the Switch, wiring, or performing maintenance or inspection. Failure to do so may result in electric shock or burning.

Use M2.3 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.23 to 0.26 N · m (2.3 to 2.7 kgf · cm).

Mount the Switch onto a flat surface. Mounting on an uneven surface may cause deformation of the Switch, resulting in faulty operation or breakage in the housing.


Operating Stroke Setting

Take particular care in setting the operating stroke for the pin plunger models. Make sure that the operating stroke is 70% to 100% of the rated OT distance. Do not operate the actuator exceeding the OT distance, otherwise the durability of the Switch may be shortened.

Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result in faulty contact. Use models that operate in the following range. However, even when using micro load models within the operating range shown below, if inrush current occurs when the contact is opened or closed, it may increase contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary.

The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% (λ.60). The equation, λ.60 = 0.5 × 10⁻⁶/operations indicates that the estimated malfunction rate is less than 1/2,000,000 operations with a reliability level of 60%.

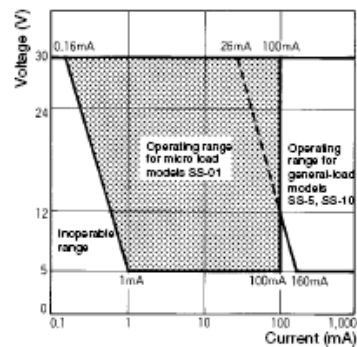

■ Separators

Applicable Switch	Thickness (mm)	Model (see note)
SS, D2S, D2SW	0.18	Separator for SS0.18
	0.4	Separator for SS0.4

Separator for SS □



Note: The material is EAVTC (Epoxyd Alkyd Varnished Tetrone Cloth) and its heat-resisting temperature is 130°C.

■ Connector

Refer to Terminal Connectors on page 282.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. B032-E1-11C

				2005	Datum	Name	Datenblatt Mikroschalter Omron
				Bearb.	06.07.	Bir.	
				Gepr.			
				Vert.			
				EDV-Datenblatt			
				nicht manuell ändern			
a	9415	27.03.0	Schillak	SCHURTER			H 905.9479-9481
-	9065	6.07.05	Birmelin				
Zu	Änd.	Datum	Name				
				D 79346 Eendingen			Seite 7 von 7 Index: --